

Figure 1 – Typical cassettes used in customer substrate processing

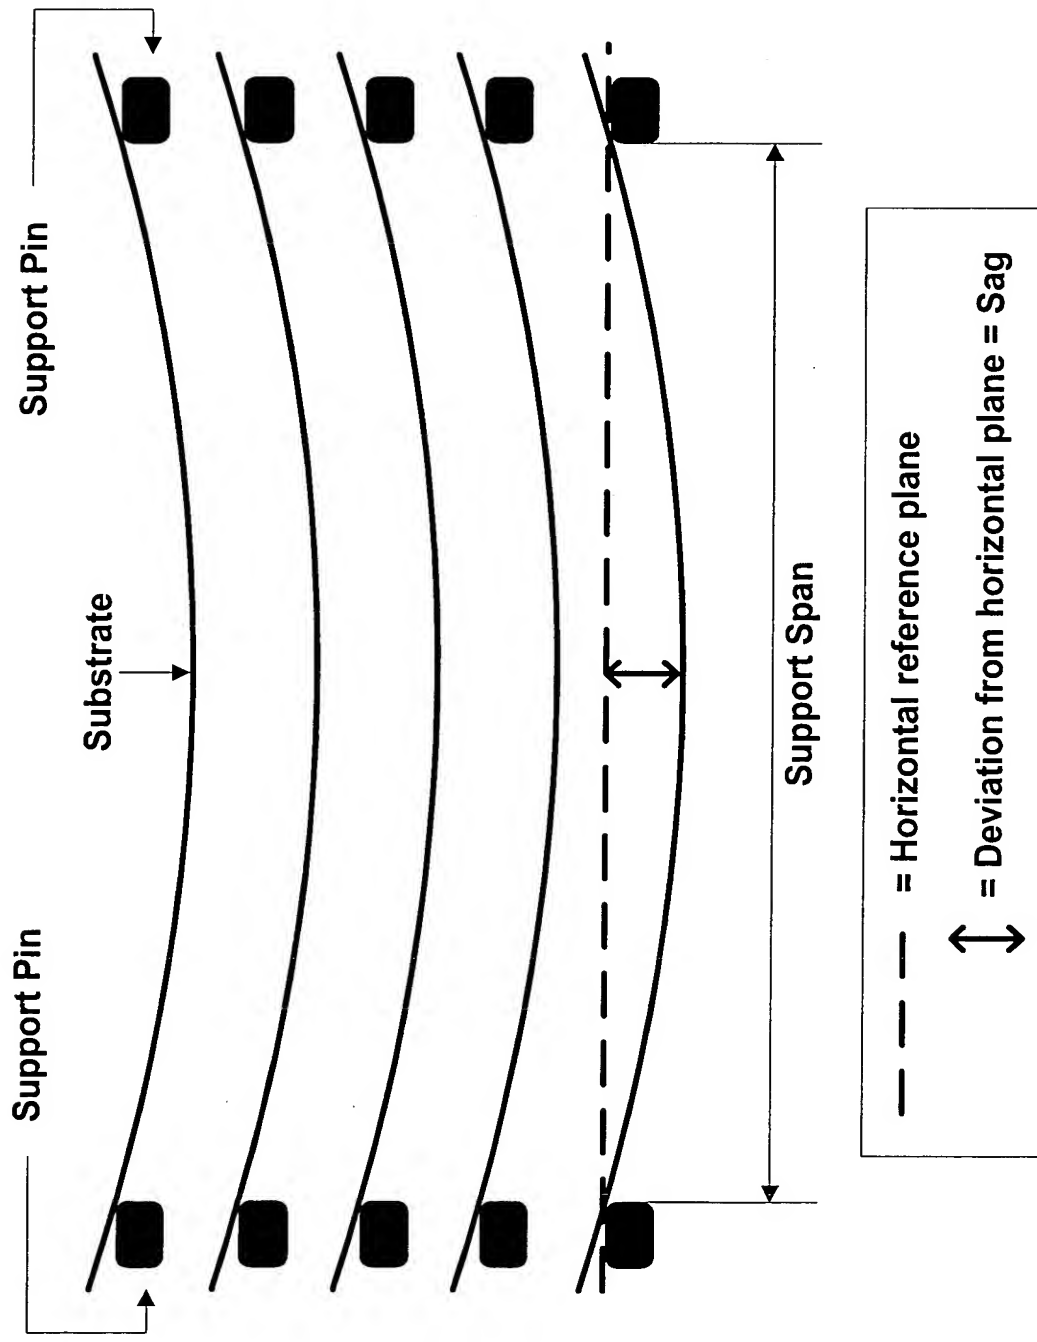


Figure 2 – Typical cassette/glass configuration used in customer substrate processing

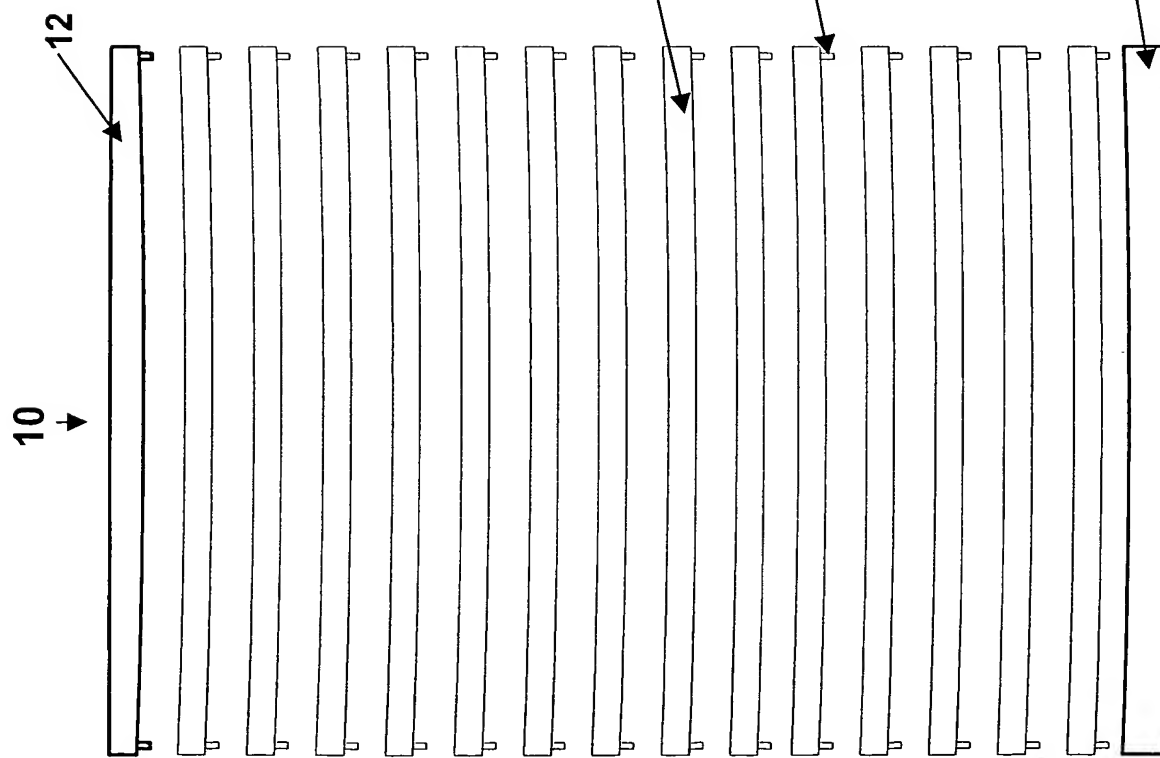


Fig 3A – Open

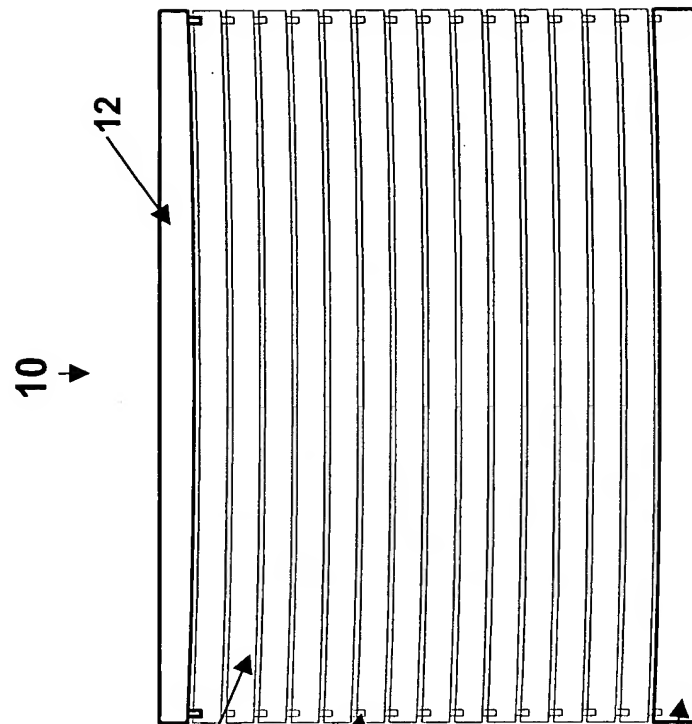


Fig 3B – Closed

Figure 3 – Typical cassette/glass configuration used in customer substrate processing

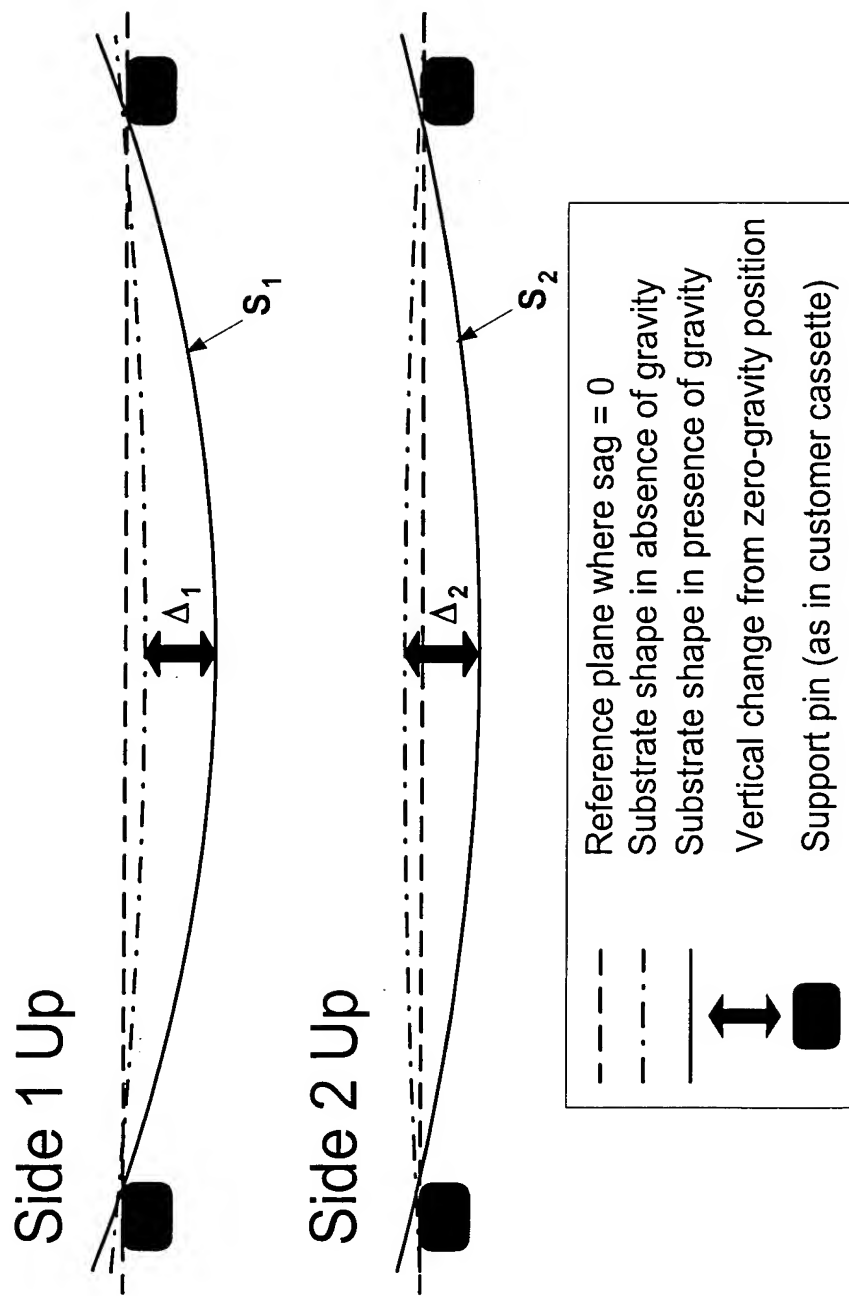


Figure 4 – Comparison of sag characteristics following use of the present invention, zero-gravity condition

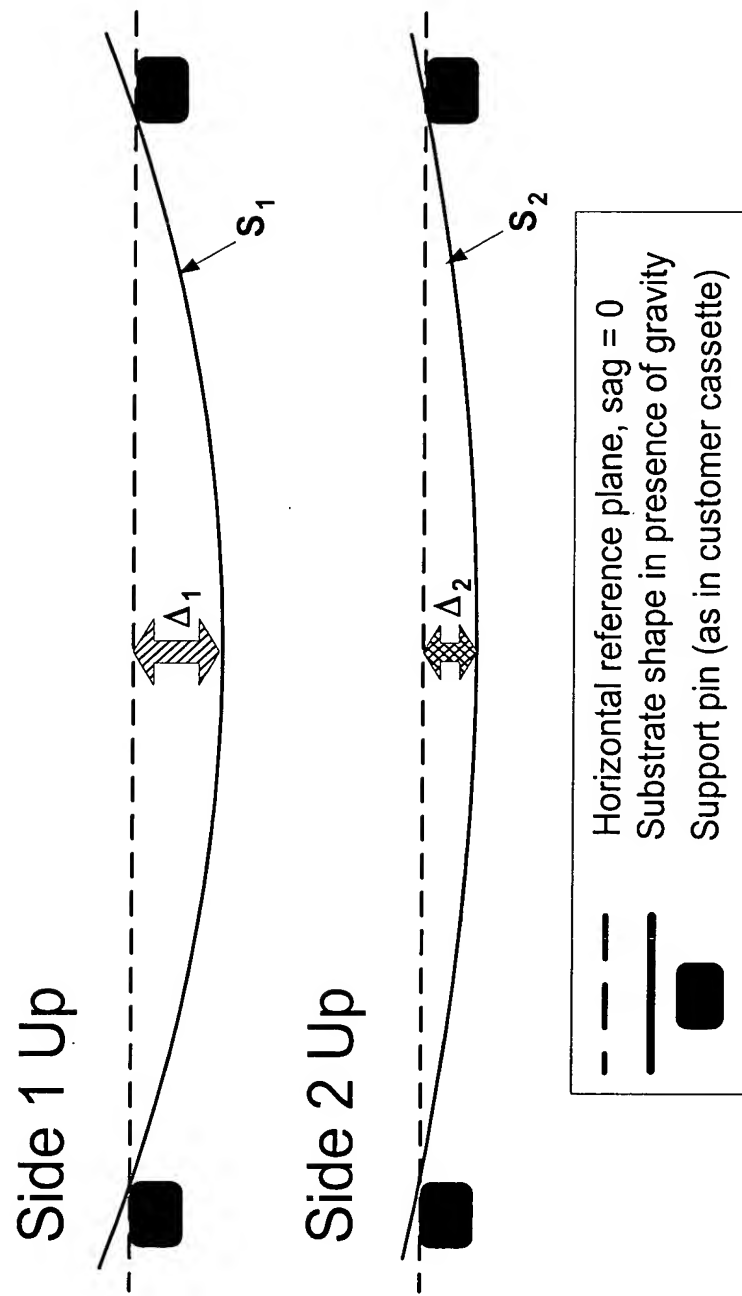


Figure 5 – Comparison of sag characteristics following use of the present invention, normal gravity condition